


zehnder

always the
best climate

Zehnder Vitalo Bar

Product data sheet

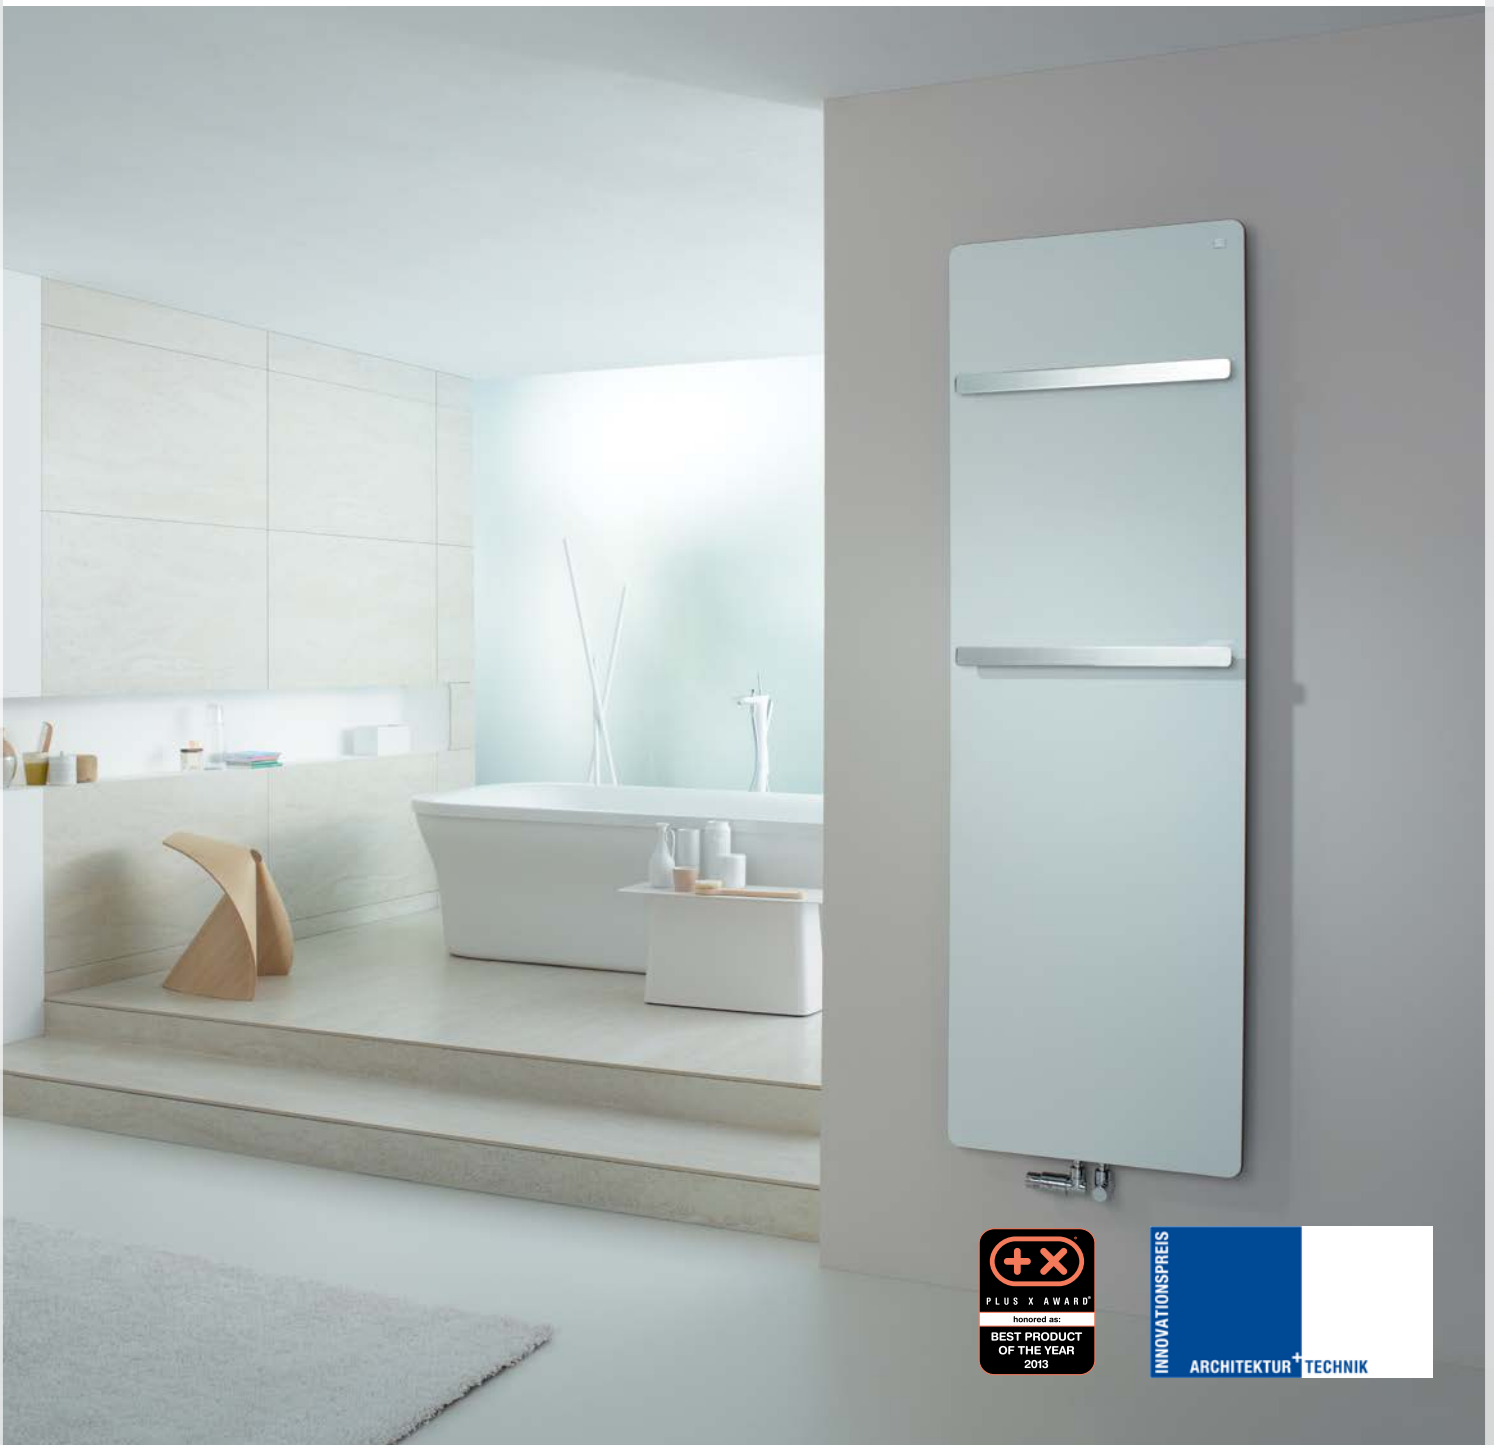

Rectangle and circle: Geometry can be so beautiful. Beautifully simple and energy-efficient. Zehnder Vitalo Bar proves the point. Top-quality surfaces make a maximum statement in a minimalist setting. Available in almost any colour and finish from the Zehnder colour chart. Also in natural anodised aluminium. One or two towel rails, depending on the height, ensure you have beautifully warm hand and bath towels.

Benefits

- Innovative technology guarantees efficient heating
- Extremely flat design creates an aesthetic accent
- Low total weight facilitates transport and installation
- Striking shape, distinctive design
- Chrome towel rail, accessible from one side, makes it very convenient for hanging and sliding towels in from the side
- Smooth surface makes for easy cleaning
- Short response time means rooms can be heated up rapidly


Special benefits for hot water operation

- Hidden connection technology and easy installation owing to optional Zehnder EasyFit connection box

Special benefits for electric operation

- Control device can be positioned as required
- Pleasant indoor climate through demand-controlled room control
- Customisable daily and weekly programmes for convenient, on-demand operation
- Timer function for on-demand operation
- Comes ready-to-plug for easy and quick installation
- Electric operation provides warm towels and comfortable rooms all year round
- Energy-efficient and comfortable heating with innovative “open window detection”
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W in stand-by mode for increased energy efficiency
- User-friendly control device allows simple operation
- Increased safety with keylock
- Flexible control options: control device for wall mounting or base
- Aesthetically appealing design due to concealed electric heating element

Model overview

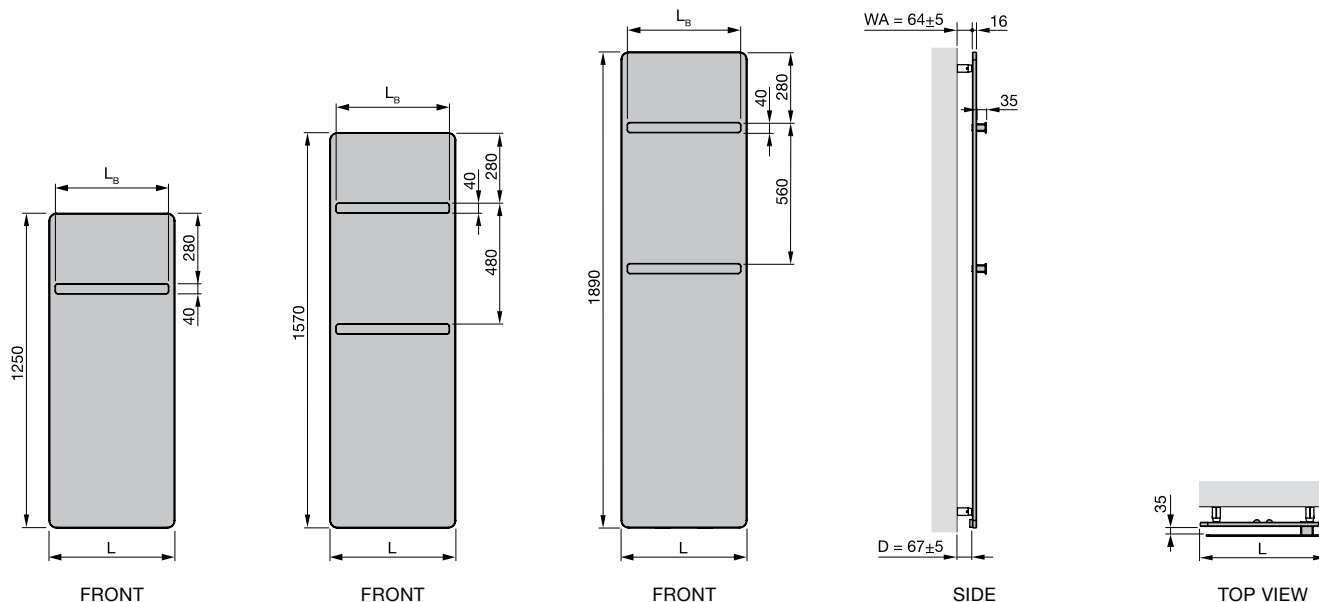

L = length
 L_B = towel rail length
 D = distance from wall to middle of connection
 WA = wall clearance

Dimensions in mm

Connection to hot water central heating system

Painted version, central connection 50 mm

Model	H mm	L mm	L _B ¹⁾ mm	Thermal output			
				75/65/20 °C ²⁾ Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt
With chrome-plated towel rail							
VIP-125-040	1250	400	350	465	338	209	249
VIP-160-040	1570	400	350	546	399	249	296
VIP-190-040	1890	400	350	673	491	305	363
VIP-125-050	1250	500	450	555	403	250	298
VIP-160-050	1570	500	450	676	493	306	364
VIP-190-050	1890	500	450	834	608	378	449
VIP-125-060	1250	600	550	641	467	291	345
VIP-160-060	1570	600	550	806	587	365	434
VIP-190-060	1890	600	550	994	725	451	536

Painted version, Zehnder EasyFit connection box

Model	H mm	L mm	L _B ¹⁾ mm	Thermal output			
				75/65/20 °C ²⁾ Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt
With chrome-plated towel rail							
VIPK-125-040	1275	400	350	465	338	209	249
VIPK-160-040	1595	400	350	546	399	249	296
VIPK-190-040	1915	400	350	673	491	305	363
VIPK-125-050	1275	500	450	555	403	250	298
VIPK-160-050	1595	500	450	676	493	306	364
VIPK-190-050	1915	500	450	834	608	378	449
VIPK-125-060	1275	600	550	641	467	291	345
VIPK-160-060	1595	600	550	806	587	365	434
VIPK-190-060	1915	600	550	994	725	451	536

Electric-only operation

Painted version

Model	H mm	L mm	L _B ¹⁾ mm	Output electric
				Watt
With chrome-plated towel rail				
VIPE-125-040/GD	1250	400	350	350
VIPE-160-040/GD	1570	400	350	500
VIPE-190-040/GD	1890	400	350	500
VIPE-160-050/GD	1570	500	450	500
VIPE-190-050/GD	1890	500	450	750
VIPE-190-060/GD	1890	600	550	1000

H = height, L = length, L_B = towel rail length

1) Number of towel rails: 1 x for H = 1250 mm, 2 x for H = 1570 and 1890 mm

2) Nominal heat output according to EN 442

Zehnder Vitalo Bar

Anodised aluminium version

Model	H	L	L _B ¹⁾	Output electric
	mm	mm	mm	Watt
With chrome-plated towel rail				
VIPES-160-40/GD	1570	400	350	500
VIPES-190-40/GD	1890	400	350	500
VIPES-160-50/GD	1570	500	450	500
VIPES-190-50/GD	1890	500	450	750
VIPES-190-60/GD	1890	600	550	1000

Product types and connection options



Hot water operation version with concealed Zehnder EasyFit connection box, including adjustment dial.



Electric operation version with remote control device.

H = height, L = length, L_B = towel rail length

1) Number of towel rails: 1 x for H = 1250 mm, 2 x for H = 1570 and 1890 mm

2) Nominal heat output according to EN 442