

**zehnder**

always the  
best climate

# Zehnder Yucca Mirror

Product data sheet



Bold, linear and striking: Zehnder Yucca Mirror dazzles with its built-in mirror. Towels can be conveniently hung up and heated. Also available with tubes located on the left- or right-hand side. Available in almost any colour and finish from the Zehnder colour chart.

## Benefits

- Mirror for added practicality
- Timeless design creates an aesthetic accent
- Elegantly enabled wall attachment via concealed bracket
- Easy cleaning with the lambswool cleaning brush from Zehnder
- The optional connection fitting provides the flexibility for all types of connection situations
- Diverse range of models with header tubes as a left- or right-hand arrangement

## Special benefits for hot water operation

- Flexible and simple installation with 50mm centre connections
- Flexible right-hand or left-hand installation


## Special benefits for dual energy operation

- Optional fitting for dual energy operation with elegant integration of electric heating element
- Dual energy operation provides warm towels and comfortable rooms all year round

## Special benefits for electric operation

- Heat is readily available due to pre-defined timer function
- Comes ready-to-plug for easy and quick installation
- Factory-assembled, elegantly integrated electric heating element reduces cost of installation
- Electric operation provides warm towels and comfortable rooms all year round
- Remote control for regulating room temperature as required with four adjustable temperatures
- Flexible control with Bluetooth and Zehnder Connect Android™ or iOS app
- Energy-efficient and comfortable heating with innovative “open window detection”
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W in stand-by mode for increased energy efficiency
- User-friendly control device allows simple operation
- Maximum surface temperature of 65°C ensures increased safety (chrome-plated version)
- Easy handling due to control knob for setting the radiator temperature and for operation using its timer function

## Model overview

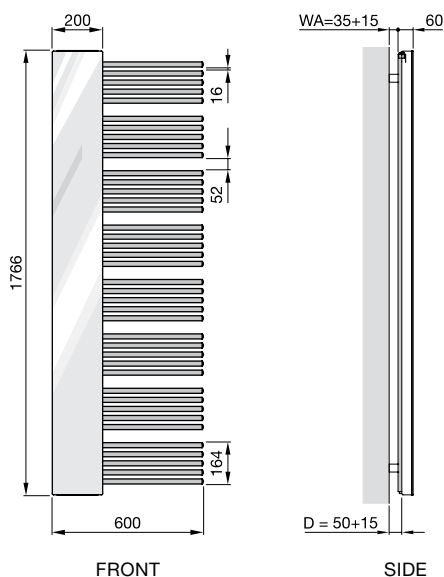

D = distance from wall to middle of connection  
 WA = wall clearance

Dimensions in mm

## Connection to hot water central heating system or for dual energy operation

Painted version

Model	H mm	L mm	Thermal output				Classification electric heating element Watt
			75/65/20 °C <sup>1)</sup> Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt	

Chrome-plated version

Model	H mm	L mm	Thermal output				Classification electric heating element Watt
			75/65/20 °C <sup>1)</sup> Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt	

## Electric-only operation

Painted version

Model	H <sup>2)</sup> mm	L mm	Output electric heating element Watt

### Right-hand version

<b>YMER-180-60/UD</b>	1876	578	600
<b>YMER-180-60/ZD</b>	1876	578	600

### Left-hand version

<b>YMEL-180-60/UD</b>	1876	578	600
<b>YMEL-180-60/ZD</b>	1876	578	600

Chrome-plated version

Model	H <sup>2)</sup> mm	L mm	Output electric heating element Watt

### Right-hand version

<b>YMECR-180-60/UD</b>	1876	578	300
<b>YMECR-180-60/ZD</b>	1876	578	300

### Left-hand version

<b>YMECL-180-60/UD</b>	1876	578	300
<b>YMECL-180-60/ZD</b>	1876	578	300

H = height, L = length

1) Nominal heat output according to EN 442

2) Total height incl. electric heating element

# Zehnder Yucca Mirror

## Product types and connection options



Electric operation version with integrated electric heating element WIVAR BASIC RF.

V20180722, RAD\_DAS, SI\_en, subject to change without notice