


Zehnder Yucca Star

Product data sheet

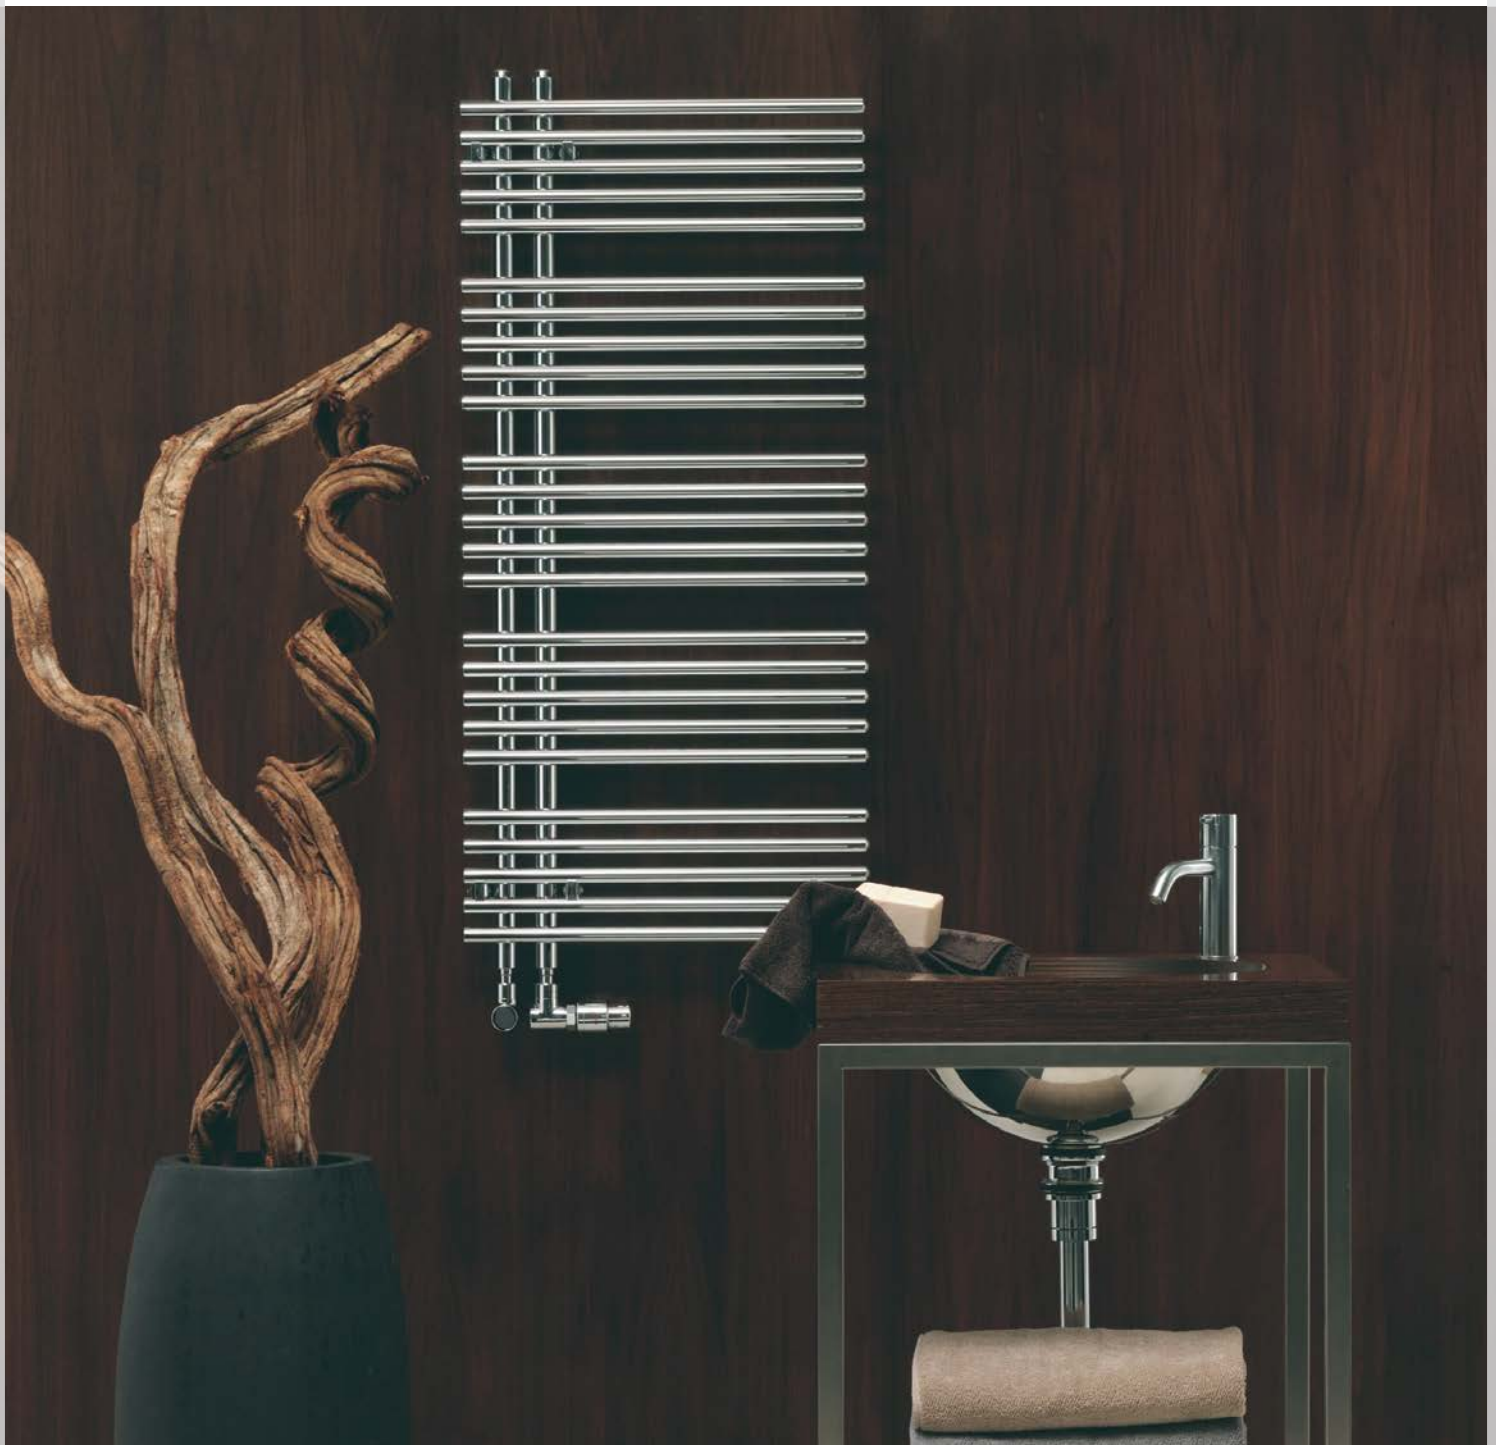

Zehnder Yucca Star transforms large and small bathrooms into oases of warmth. The discreet decorative radiator can be mounted to the wall or installed as a room divider. Towels are conveniently and simply hung from the side. Available in almost any colour and finish from the Zehnder colour chart.

Benefits

- Light and seamless design enhances any room
- Corrosion-resistant materials also make it suitable for use with open heating systems
- Special solutions support a wide range of application, such as room divider

Special benefits for hot water operation

- Connection from top possible
- Flexible installation due to 50mm centre connections
- Flexible installation through right and left connection options


Special benefits for dual energy operation

- Dual energy operation with connection fittings possible
- The electric radiator provides warm towels and rooms all the year round

Special advantages for electric operation

- Energy-efficient and comfortable heating with innovative “open window detection”
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W in stand-by mode for increased energy efficiency
- User-friendly control device allows simple operation
- Customisable daily and weekly programmes for convenient, on-demand operation
- Timer function for on-demand operation

Model overview

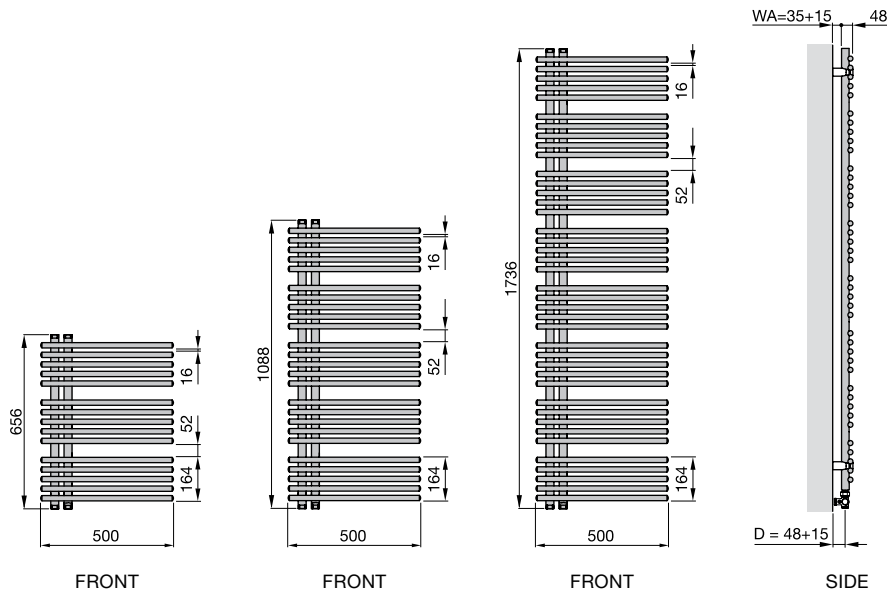

WA = wall clearance

D = distance from wall to middle of connection

Dimensions in mm

Zehnder Yucca Star

Connection to hot water central heating system, open heating systems or for dual energy operation

Painted version

| Model | H mm | L mm | Thermal output | | | | Classification electric heating element Watt |
|-------|---------|---------|---------------------------|-------------|-------------|-------------|--|
| | | | 75/65/20 °C ¹⁾ | 70/55/24 °C | 55/45/24 °C | 55/45/20 °C | |
| | | | Watt | Watt | Watt | Watt | |

Single-layer version

| | | | | | | | |
|--------------------|------|-----|-----|-----|-----|-----|-----|
| YAS-070-050 | 656 | 500 | 309 | 223 | 136 | 163 | - |
| YAS-120-050 | 1088 | 500 | 492 | 352 | 213 | 256 | 300 |

Chrome-plated version

| Model | H mm | L mm | Thermal output | | | | Classification electric heating element Watt |
|-------|---------|---------|---------------------------|-------------|-------------|-------------|--|
| | | | 75/65/20 °C ¹⁾ | 70/55/24 °C | 55/45/24 °C | 55/45/20 °C | |
| | | | Watt | Watt | Watt | Watt | |

Single-layer version

| | | | | | | | |
|---------------------|------|-----|-----|-----|-----|-----|-----|
| YASC-070-050 | 656 | 500 | 203 | 146 | 90 | 107 | - |
| YASC-120-050 | 1088 | 500 | 338 | 242 | 147 | 176 | 300 |

H = height, L = length

1) Nominal heat output according to EN 442